
Technical Report On A Preliminary Assessment Study For The Kenbridge Deposit, Kenora, Ontario, Canada

for



CANADIAN ARROW MINES LTD.

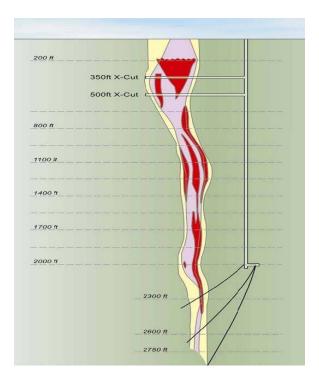

February 2008





INTERNATIONAL LIMITED mineral industry consultants



TABLE OF CONTENTS

MII PRI M	CCUTIVE SUMMARY NERAL RESOURCE ELIMINARY ASSESSMENT STUDY lining	1 2 4 4
Processing Infrastructure and G&A Manpower Capital Expenditures and Operating Costs Financial Analysis		5 5
		6
		6
		6
	COMMENDATIONS	7
1.0	INTRODUCTION	9
2.0	DISCLAIMER	11
3.0	LOCATION & ACCESS	13
3.1	LOCATION	13
3.2	ACCESS	13
4.0	PHYSIOGRAPHY & CLIMATE	15
	PHYSIOGRAPHY	15
4.2	CLIMATE	15
5.0	PROPERTY DESCRIPTION AND OWNERSHIP	16
	OWNERSHIP	16
5.2	OWNERSHIP OBLIGATIONS	16
	GEOLOGICAL SETTING	19
	REGIONAL GEOLOGICAL SETTING	19
	PROPERTY GEOLOGY	19
6.3	DEPOSIT TYPES	26
7.0	MINERALIZATION	28
8.0	EXPLORATION	34
	EXPLORATION HISTORY	34
	GEOLOGICAL SURVEYS	35
8.3	CANADIAN ARROW TRENCHING AND DRILLING	38
9.0	DRILLING	40
	SURVEYING	40
9.2	DRILLING PATTERN AND DENSITY	44

Page

10.0 SAMPLING APPROACH AND METHODOLOGY	47
10.1 SAMPLING PROTOCOLS	47
11.0 SAMPLE PREPARATION, ANALYSES AND SECURITY	51
11.0 SAMPLE PREPARATION, ANALYSES AND SECURITY 11.1 SAMPLE PREPARATION AND ANALYSES	51
11.1 SAWI LE I KEI AKATION AND ANAL ISES 11.2 QUALITY ASSURANCE AND QUALITY CONTROL PROGRAMME	52
11.3 SPECIFIC GRAVITY DATABASE	52 60
II.3 SFECIFIC GRAVILI DATADASE	00
12.0 DATA VERIFICATION	65
12.1 HISTORICAL DATA VERIFICATION	65
12.2 CONTROL SAMPLING ASSAY PROTOCOLS	65
12.3 INDEPENDENT VERIFICATIONS	65
13.0 ADJACENT PROPERTIES	67
14.0 MINERAL PROCESSING, MINERALOGY AND METALLURGICAL	
TESTING	68
15.0 MINERAL RESOURCE ESTIMATES	69
15.1 DATABASE VALIDATION	69
15.2 RESOURCE ESTIMATION	70
15.2.1 Database	70
15.2.2 Solid Body Modelling	70
15.2.3 Compositing	71
15.2.4 Statistics	74
15.2.5 Grade Capping	74
15.2.6 Variography	74
15.2.7 Block Model and Grade Estimation	83
15.3 MODEL VALIDATION	86
15.4 MINERAL RESOURCE CLASSIFICATION	86
15.5 MINERAL RESOURCE STATEMENT	89
15.6 RESOURCE INTERPRETATIONS AND CONCLUSIONS	95
15.7 RECOMMENDATIONS	96
16.0 MINING	97
16.1 GENERAL DESCRIPTION	97
16.2 GEOTECHNICAL	97
16.3 EXISTING MINE INFRASTRUCTURE	97
16.4 OPEN PIT MINING	98
16.5 OPEN PIT OPTIMIZATION	98
16.6 POTENTIAL MINEABLE RESOURCE ESTIMATE	101
16.7 MINE PLAN AND PRODUCTION SCHEDULE	101
16.8 OPEN PIT MINING OPERATIONS	104
16.8.1 Waste Stockpile	104
16.9 UNDERGROUND MINE DESIGN	105
16.10 POTENTIAL MINEABLE RESOURCE ESTIMATE	107
16.11 MINE ACCESS AND INFRASTRUCTURE	107

iii

16.11.1	Shaft Hoisting Facilities	107
16.11.2	Shaft Configuration	108
16.11.3	Shaft Dewatering	108
	RAMP AND SUBLEVELS	108
16.13	OTHER INFRASTRUCTURE	112
16.13.1	Ore Pass and Waste Pass	112
16.13.2	Ventilation	112
16.13.3	Mine Dewatering	112
16.13.4	Maintenance Shop	113
	Other Facilities	113
16.13.6	Mine Communications and Controls System	114
16.14	MINING METHOD	114
16.15	MINING OPERATIONS	115
16.15.1	Stope Development	115
	Drilling	115
16.15.3	Blasting	115
	Mucking	115
	Backfilling	115
16.16	MINING SEQUENCE	116
16.17	UNDERGROUND PRODUCTION & DEVELOPMENT SCHEDULES	116
16.18	MINING AND SERVICES MOBILE EQUIPMENT	116
16.19	WASTE STOCKPILE	116
16.20	MINE SUPPORT FACILITIES	119
16.21	CAPITAL EXPENDITURES	119
16.22	MANPOWER	120
16.23	OPERATING COSTS	120
17.0 PR	OCESSING AND TAILINGS	128
17.1 OR	E CHARACTERIZATION, MINERALOGY AND METALLURGY	128
17.1.1	Falconbridge Pilot Plant Tests	128
17.1.2	SGS Laboratory Tests (2006)	130
17.1.3	Mineralogy	130
17.1.4	Grindability	130
17.1.5	Pre-Concentration	132
17.1.6	Flotation	132
17.2 CO	NCEPTUAL PROCESS DESIGN	132
17.2.1	Process Flowsheet	132
17.2.2	Process Design Criteria	135
17.2.3	Material Balance	137
17.3 TAI	LINGS MANAGEMENT	137
17.4 OR	DER OF MAGNITUDE PROCESS CAPITAL COST ESTIMATE	137
17.5 OR	DER OF MAGNITUDE PROCESS OPERATING COST ESTIMATE	141
17.6 SUN	IMARY AND RECOMMENDATIONS	147
18.0 IN	FRASTRUCTURE	148
18.1 ACC	CESS ROAD	148
18.2 SIT	E ROADS	148
		iv

18.3 MINE SUPPORT SERVICES SITE	150	
18.3.1 Surface Maintenance Shop	150	
18.3.2 Mine Dry/Administration Building	150	
18.3.3 Warehouse/Laydown Yard	150	
18.4 ELECTRICAL POWER SUPPLY	151	
18.5 WATER SUPPLY	151	
18.6 WASTE DISPOSAL	151	
18.7 TELECOMMUNICATIONS AND COMPUTER NETWORKING	151	
18.7.1 Telecommunications	151	
18.7.2 Computer LAN's and Networking	152	
18.8 CAPITAL EXPENDITURES	152	
18.9 MANPOWER	152	
18.10 OPERATING COSTS	152	
19.0 GENERAL & ADMINISTRATION	155	
19.1 ADMINISTRATION	155	
19.2 PROCUREMENT	155	
19.3 HUMAN RESOURCES	156	
19.4 SECURITY	156	
19.5 MANPOWER	156	
19.6 OPERATING COSTS	156	
20.0 MANPOWER	159	
21.0 SOCIO ECONOMIC AND ENVIRONMENTAL	161	
22.0 CAPITAL EXPENDITURES	164	
22.1 PROJECT CAPITAL EXPENDITURES	164	
22.2 PROJECT SUSTAINING CAPITAL	164	
23.0 OPERATING COSTS	166	
24.0 PROJECT SCHEDULE	168	
25.0 FINANCIAL ANALYSIS	170	
25.1 FINANCIAL RETURNS	171	
26.0 CONCLUSIONS AND RECOMMENDATIONS	173	
26.1 CONCLUSIONS	173	
26.2 RECOMMENDATIONS	174	
27.0 REFERENCES	177	
28.0 CERTIFICATES	178	
APPENDICES		

Kenbridge Project, Kenora, Ontario Preliminary Assessment Study

v